



# Electric curtain wiring instructions

## 1、 Electric curtain wiring schematic diagram:

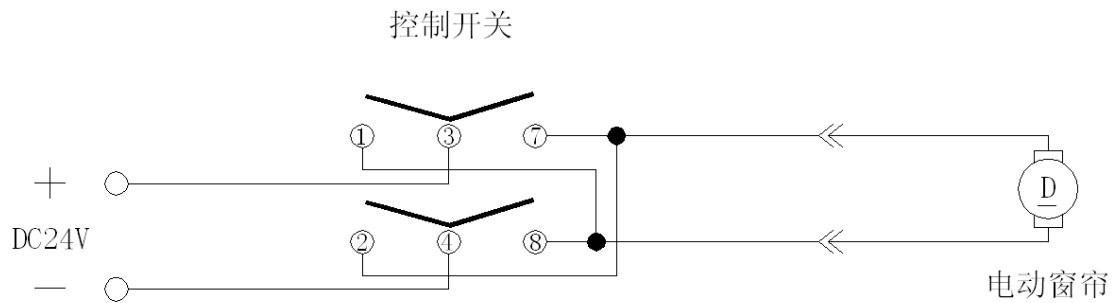


电动窗帘接线原理图

## 2、 Control switch physical wiring diagram:

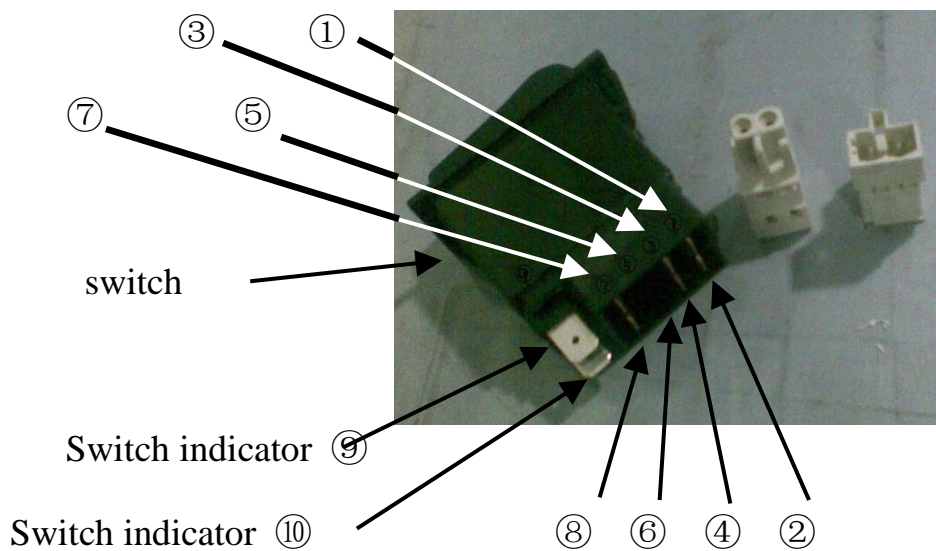

## 3、 Electric curtain physical wiring diagram:

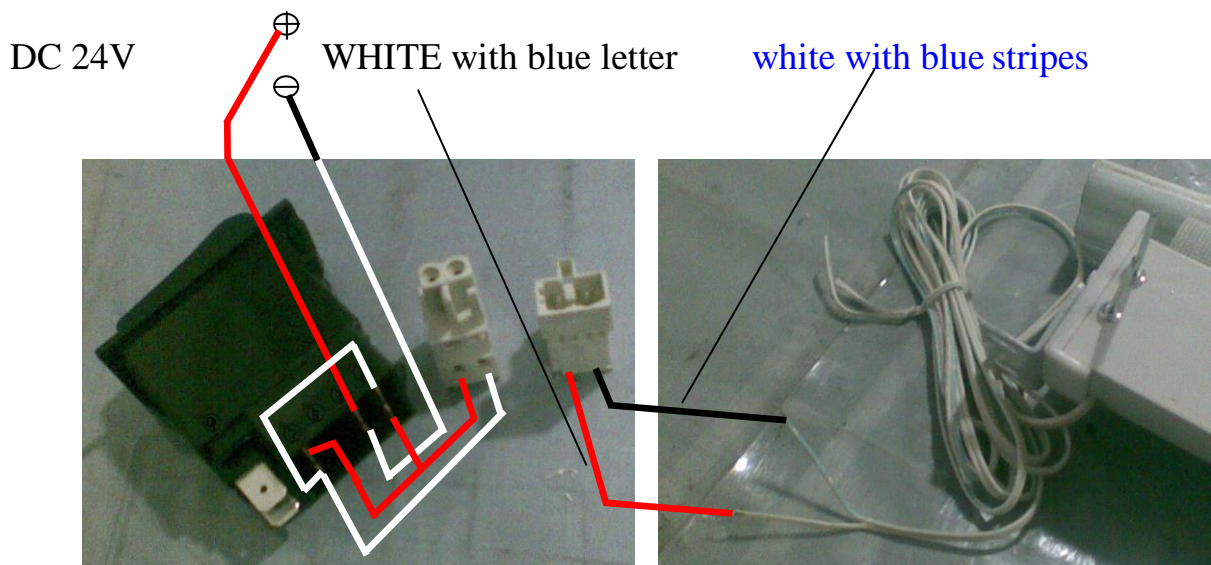

## Electric curtain wiring instructions

### 4、Wiring instructions:

24V positive pole of the DC power supply is connected to the control switch ③;

24V negative pole of the DC power supply is connected to the control switch ④

Control switch ① and ⑧ Short circuit and then connect to one end of the female connector; Control switch ② and ⑦ Short circuit and then connect to the other end of the female connector;

The male connector is connected to the two thread ends of the electric curtain motor; If the direction of the motor is reversed after wiring, interchange the 24V DC power wires.